

Lexmark X950 Series

Powerful colour performance for your workgroup.



۲



25 cm (10-inch) class touch











Scan



screen

Outstanding colour output

Make a lasting impression on your customers and do more printing in-house with vibrant, professional-quality output on a wide variety of media. With the advanced technology of the Lexmark X950 Series, you'll get high-performance tabloid multifunction capability that produces consistent colour from the first page to the last.

- 1200 x 1200 print resolution for rich vibrant colours and crisp black text.
- Match brand sensitive corporate colours on marketing collateral and within Microsoft Office with Lexmark Named Colour Replacement and PANTONE® calibration
- Lexmark Colour Care Technology to manage colour use and control costs.
- Create professional collateral materials ranging from saddle stitch booklets to folded brochures on media up to 12.6 x 48 inches.

Productive and intuitive

The Lexmark X950 Series combines high-performance printing, copying, scanning and faxing with time-saving workflow applications designed to boost your productivity.

- Print and copy at speeds up to 55 ppm black and 50 ppm colour, and scan at speeds up to 70 images per minute; time to first copy as quick as 6.4 seconds.
- Extra large, easy to navigate 25 cm (10-inch) class colour touch screen provides audible and tactile feedback to make completing tasks intuitive.
- Preloaded applications help you drive greater efficiency in your workflow.
- Scan to multiple destinations, including scan to e-mail, scan to FTP, scan to fax, scan to network, scan to USB drive, and more.

Built for business

The Lexmark X950 Series features a robust print engine designed to handle the most demanding workloads with the advanced features and flexibility you need to run your business.

- Robust connectivity makes it easy to integrate into almost any network environment.
- Simplify device monitoring and administration through the embedded web server, Lexmark Universal Print Driver, and Lexmark Markvision Enterprise.
- High-capacity hard disk, 1.2 GHz processor, and up to 2GB RAM.
- Inner Tray 2 is standard, allowing you to separate print, copy or fax output into two bins.
- Choose from multiple input options to expand capacity up to 5,140 sheets.
- Easy-to-replace aftermarket cartridges provide yields of up to 32,000¹ pages black and up to 22,000¹ pages colour

The right touch

The Lexmark e-Task colour touch screen is a key access point to your MFP. The extra large customisable 25 cm (10-inch) interface gives you the ability to preview thumbnails of documents prior to printing, as well as to change print jobs at the device. You can even view, select and print specific pages within a document directly from the touch screen. Easy-to-use, intuitive navigation provides fast access to the functions, shortcuts and workflows you use most, and through the MyMFP feature, you can tailor your device with personal settings. New interactive sensory features provide both tactile and audible feedback, helping to guide you through each operation, confirming a touch has registered and indicating an action is transpiring.

Preloaded solutions* on the X950 series:



Forms and Favorites

Eliminate waste and inefficiencies associated with preprinted forms. Store frequently printed forms, marketing materials or other documents online, then print them on demand.



Scan to Network

Scan a hardcopy document and route the image to one of 30 predefined personal or public shared network folders.



Change Language**

Easily switch the language displayed on the touch screen–18 languages supported.

Examples of solutions available through Lexmark authorised partners and dealers, or through a Lexmark Professional Services engagement:



Scan to Network Premium

This enhanced version of Scan to Network offers advanced functionality to preview, modify, enhance and index scanned documents before routing them to a shared network folder.



Showroom

Display a customisable, scrolling slideshow on the colour touch screen to promote your business or products, or to communicate important messages to your customers or employees.



Card Copy

Save time and effort in copying identification cards, licenses and insurance cards by automatically scanning, enlarging and printing both sides of a two-sided card onto one side of a sheet of paper.



^{*} Additional solutions are available ** Opt-in to Change Language during installation

Consistent colour every time

Produce professional documents confidently in-house knowing that the named colours of your company's brand and logo will print accurately and consistently every time. Included standard with your device, users can match brand sensitive corporate colours on marketing collateral and within Microsoft Office with Lexmark Named Colour Replacement and PANTONE® calibration.

Protecting your information

From the data traveling through your network to the pages being printed, multilayered security features and built-in capabilities help you protect your devices, documents, data and network.

- Supports a variety of user authentication and authorisation controls.
- Card reader option allows users to authenticate with proximity or swipe cards.
- Advanced hard disk encryption protects sensitive data on the printer's disk drive.
- Automatic, scheduled or manual disk wiping removes latent data.
- ▶ IPSec, SNMPv3 and 802.1x network security are supported.
- Security-audit logging tracks and identifies security risks.

Easy device management

Manage your output environment effectively with Lexmark Markvision Enterprise. This free browserbased software gives you complete visibility into your entire fleet of network printers and MFPs regardless of manufacturer. Markvision Enterprise makes it easy for administrators to configure, track, view, troubleshoot and proactively manage devices throughout their lifecycle, from the moment you connect them to the network until the day you retire them.





Intuitive colour touch screen

The extra large 25 cm (10-inch) colour touch screen allows you to operate your MFP with ease through intuitive navigation and easy access to workflow solutions and shortcuts.



Direct USB

The front USB port allows for convenient walk-up printing and is compatible with many printable image file formats.



Flexible input capacity Choose the configuration that best fits your needs, up to a maximum of 5,140 sheets.



Exceptional media handling

Ultra-reliable paper feeding lets you load up to six different types of media, including sizes up to 12.6 x 48 inches and weights up to 300 gsm.




Advanced finishing options

Easily create professional output in-house with flexible finishing options, including multi-position stapling, hole punch, expanded output stacking, and booklet capability.

•	Employee Application	0
	Facilities Map	0
	P) Insurance Claim	0
	Tax Form	0
	Time Sheet	0

Lexmark solutions

Reduce unnecessary printing and simplify work processes through solutions applications preloaded on your device. Choose additional Lexmark solutions to fit your unique workflow needs.

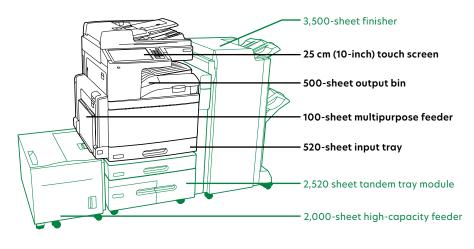

Standard

Optional

The line art features the standard set-up that can be different per model.

X950 Series

Part #	Models	Part #	Extended warranties
22Z0072	Lexmark X950de	2354235	X950 2-Years Total Onsite Service, Next Business Day
Part #	Laser toner/print cartridge	2354236	X950 3-Years Total Onsite Service, Next Business Day
X950X2KG	X95x Black Extra High Yield Toner Cartridge	2354237	X950 4-Years Total Onsite Service,
X950X2CG X950X2MG	X95x Cyan Extra High Yield Toner Cartridge X95x Magenta Extra High Yield Toner Cartridge	2354238	Next Business Day X950 5-Years Total Onsite Service,
X950X2YG	X95x Yellow Extra High Yield Toner Cartridge	225 4220	Next Business Day
C950X71G C950X73G	C950, X95x Photoconductor Unit 1-pack C950, X95x Photoconductor Unit 3-pack	2354239	X950 1-Year Onsite Service Renewal, Next Business Day
C950X76G	C950, X95x Waste Toner Bottle	2354263	X952 2-Years Total Onsite Service,
25A0013 21Z0357	Staple Cartridges (3 pack) Booklet Saddle Staple Cartridges (4 pack)	2354264	Next Business Day X952 3-Years Total Onsite Service.
2120337	Booklet Suddle Staple Calthages (4 pack)		Next Business day
Part #	Paper handling	2354265	X952 4-Years Total Onsite Service, Next Business Day
22Z0014	C950, X95x 2520-sheet tandem tray module	2354266	X952 5-Years Total Onsite Service,
22Z0013	C950, X95x 3x520-sheet drawer stand	2354267	Next Business Day 1-Year Onsite Renewal, Next Busines
22Z0012	C950, X95x 520-sheet drawer stand	2354291	X954 2-Years Total Onsite Service,
22Z0016	C950, X95x 3500-sheet finisher (3-hole)	2354292	Next Business Day X954 3-Years Total Onsite Service,
22Z0017	C950, X95x Booklet finisher (3-hole)	2334292	Next Business Day
22Z0015	C950, X95x 2000-sheet high capacity feeder	2354293	X954 4-Years Total Onsite Service, Next Business Day
		2354294	X954 5-Years Total Onsite Service,
Part #	Memory options	225 (205	Next Business Day
1025041	256MB DDR2-DRAM	2354295	1-Year Onsite Renewal, Next Busines
1025042 1025043	512MB DDR2-DRAM 1024MB DDR2-DRAM	Part #	User replaceable parts
14F0245	256MB Flash Card	40X7540	C950, X95x 160K Maintenance Kit
27X0014 30G0287	160+ GB Hard Disk Arabic Font Card	40X7569	C950, X95x Fuser Maintenance
30G0287 30G0828	Japanese Font Card	40X7530	Kit, 320K, 220-240V X95x ADF Maintenance Kit
30G0825	Korean Font Card	408/550	X95X ADF Maintenance Kit
30G0826 30G0827	Simplified Chinese Font Card Traditional Chinese Font Card	Part #	Service parts
500002/		40X7560	C950, X95x 480K Maintenance Kit
Part #	Application solutions		
22Z0186	X950, X952, X954 Card for IPDS		
22Z0187	X950, X952, X954 Card for PRESCRIBE Emulation		
22Z0185 57X9000	X950, X952, X954 Forms and Bar Code Card Lexmark PrintCryption Card		
37 89000	Lexindry Frince yption Card		

Part # Connectivity

27X0025	MarkNet N8250 802.11b/g/n Wireless Print Server
14F0042	MarkNet N8130 Fiber Ethernet
	100BaseFX, 10BaseFL Print Server
1021294	USB Cable (2-meter)
14F0000	Parallel 1284-B Interface Card
1021231	Parallel Cable (10-foot)
14F0100	RS-232C Serial Interface Card

Booklet finisher

520-sheet drawer stand



X950 2-Years Total Onsite Service,	
Next Business Day	
X950 3-Years Total Onsite Service,	
Next Business Day	
X950 4-Years Total Onsite Service, Next Business Day	
X950 5-Years Total Onsite Service,	
Next Business Day	
X950 1-Year Onsite Service	
Renewal, Next Business Day	
X952 2-Years Total Onsite Service,	
Next Business Day	
X952 3-Years Total Onsite Service.	
Next Business day	
X952 4-Years Total Onsite Service,	
Next Business Day	
X952 5-Years Total Onsite Service,	
Next Business Day	
1-Year Onsite Renewal, Next Business Day	
X954 2-Years Total Onsite Service,	
Next Business Day	
X954 3-Years Total Onsite Service, Next Business Day	
X954 4-Years Total Onsite Service.	
Next Business Day	
X954 5-Years Total Onsite Service.	
Next Business Day	
1-Year Onsite Renewal, Next Business Day	
,	
User replaceable parts	
C950, X95x 160K Maintenance Kit	









Print Specify Consume to a start of a sta	Product specifications	Lexmark X950de	Lexmark X952de	Lexmark X954de
Print Speed: Up to Black: 45 ppm / Colour: 40 ppm Black: 55 ppm / Colour: 72 seconds Time to First Page: As fast as Black: 55 seconds / Colour: 72 seconds Black: 50 seconds / Colour: 72 seconds Print Resolution Black: 50 seconds / Colour: 72 seconds Black: 50 seconds / Colour: 72 seconds Print Resolution Standard: 1024 MB / Maximum: 2048 MB Standard: 2048 MB / Maximum: 2048 MB Maximum Monthly Duty Cycle: Up to ² 200000 pages per month 220000 pages per month 200000 pages per month Copy Speed: Up to Black: 51 seconds / Colour: 04 opm Black: 64 seconds / Colour: 90 seconds Black: 55 cpm / Colour: 90 speed: 0 Sconner Type / ADF Scan Black: 64 per minute / Colour: 30 / 37 sides per minute / Colour: 50 / 50	Print			
Time to First Page: As fast as Black: S5 seconds / Colour: 7.7 seconds Black: S2 seconds / Colour: 7.7 seconds Black: S0 seconds / Colour: 7.7 seconds Print Resolution Black: S0 seconds / Colour: 7.7 seconds Black: S0 seconds / Colour: 7.7 seconds Black: S0 seconds / Colour: 7.7 seconds Marror Standard: 1024 MB / Maximum: 2048 MB Standard: 2048 MB / Maximum: 2048 MB Marror Marror Standard: 2048 MB / Maximum: 2048 MB Standard: 2048 MB / Maximum: 2048 MB Maximum Monthly Duty Cycle: Up 200000 pages per month Z50000 pages per month Z50000 pages per month Copy Speed: Up to Black: 45 cpm / Colour: 0.4 seconds Black: 55 cpm / Colour: 9.0 seconds Black: 55 cpm / Colour: 9.0 seconds Scamer Type / ADF Scan Black: 7.1 seconds / Colour: 10.4 second Black: 68 / 70 sides per minute / Colour: 8.1 % seconds / Colour: 9.0 seconds Al/Ltr Up Lycle: Black: 68 / 70 sides per minute / Colour: 8.1 % seconds / Colour: 9.0 seconds Second Supplies Standard: 7.0 sides per minute / Colour: 8.1 % seconds / Colour: 9.0 seconds Seconds / Colour: 9.0 seconds Supplies Standard: 6.0 more field: Color: 9.0 seconds / Colour: 9.0 seconds Seconds / Colour: 9.0 seconds Pager Handling Opooonge Econd Court (CMY) Toner Cartridges, 12.000-page	Display	Lexmark e-Task 10-inch (25 cm) class color touch screen		
Print Resolution Black: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 2400 Image Quality / Colour: 1200 x 1200 dpi, 25000 pages per month Standard: 1200 X 1200 Dpi, 25000 pages per month Z5000 pages per month Z5000 pages per month Z5000 pages per month Black: 50 cpn / Colour: 50 cpn Black: 51 cpn / Colour: 50 cpn Standard: Colour: 50 cpn	Print Speed: Up to	Black: 45 ppm / Colour: 40 ppm	Black: 50 ppm / Colour: 45 ppm	Black: 55 ppm / Colour: 50 ppm
Memory Standard: 1024 MB / Maximum: 2048 MB Standard: 2048 MB / Maximum: 2048 MB Hard Dak Included in configuration Recommended Manthly Poge Volume ⁴ 200000 pages per month 250000 pages per month 250000 pages per month Copy Speet Up to Black: 45 cpm / Colour: 40 cpm Black: 50 cpm / Colour: 54 cpm Black: 55 cpm / Colour: 50 cpm Copy Speet Up to Black: 45 cpm / Colour: 10.4 seconds Black: 50 cpm / Colour: 54 seconds / Colour: 9.9 seconds Scomer Type / ADF Scon Flatck d5 cpm / Colour: 50 / 52 seconds / 50 second / 50	Time to First Page: As fast as	Black: 5.5 seconds / Colour: 7.7 seconds	Black: 5.2 seconds / Colour: 7.7 seconds	Black: 5.0 seconds / Colour: 7.2 seconds
Herd Disk Included in configuration Recommended Monthly Duty Cycle: Up to ³ 200000 pages per month 250000 pages per month 250000 pages per month Copy Environmended Monthly Duty Cycle: Up to ³ Black: 45 cpm / Colour: 10.4 seconds Black: 50 cpm / Colour: 10.4 seconds Black: 50 cpm / Colour: 50 cpm Copy Speed: Up to Black: 45 cpm / Colour: 10.4 seconds Black: 63 seconds / Colour: 10.4 seconds Black: 64 seconds / Colour: 9.9 seconds Scone Scone Black: 63 per discuss Black: 63 per minute / Colour: 30 f 37 sides per minute / Colour: 32 / 52 sides per minute Ad/Ltr Sinplex Scon Speed: Up to Black: 64 / 70 sides per minute / Colour: 32 / 52 sides per minute E Supples Yield Colour: 33 / 33 sides per minute / Colour: 34 / 33 sides per minute E Supples Yield 22.000-page Colour (CMY) Tomer Cartridges, 32.000-page Black Tomer Cartridge P Poper Hondling 11.000-page Colour (CMY) Tomer Cartridges, 10,000-page Black Starter Tomer Cartridge P Paper Hondling Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Paper Hondling Standard Cardrad Standard Standar	Print Resolution	Black: 1200 x 1200 dp	i, 2400 Image Quality / Colour: 1200 x 1200 dp	i, 2400 Image Quality
Recommended Monthly Page Volume* 5000 - 33000 pages 25000 pages per month 250000 pages per month Copy Copy Speet's Up to Black: 45 cpm / Colour: 10.4 seconds Black: 50 cpm / Colour: 10.4 seconds Black: 55 cpm / Colour: 50 cpm Time to First Copy: as fast as Black: 7.1 seconds / Colour: 10.4 seconds Black: 55 cpm / Colour: 9.9 seconds Black: 54 cpm / Colour: 9.9 seconds Scame: Type / ADF Scan Scame: Type / ADF Scan Black: 65 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute Ad/Ltr Simplex Scan Speed: Up to Black: 66 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute Face Black: 68 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute Supples States per discussed per minute / Colour: 52 / 52 sides per minute Supples States per discussed per discussed per discussed per second per discussed per discussed per per discussed per per discussed per discused	Memory	Standard: 1024 MB / Maximum: 2048 MB Standard: 2048 MB / Maximum: 2048 MB		
Maximum Monthly Dury Cycle: Up tol 200000 pages per month 225000 pages per month 250000 pages per month Copy U Copy Speed: Up to Black: 45 cpm / Colour: 40 cpm Black: 50 cpm / Colour: 9.0 seconds Maximum Monthly Dury Cycle: Up to Black: 45 cpm / Colour: 40 cpm Black: 6.8 seconds / Colour: 10.4 seconds Black: 55 cpm / Colour: 9.0 seconds Stam To Black: 64 seconds / Colour: 10.4 seconds Black: 64 seconds / Colour: 34 / 37 sides per minute / Colour: 32 / 37 sides per minute / Colour: 32 / 37 sides per minute / Colour: 32 / 52 sides per minute Al/Ltr Dugle: Scan Speed: Up to Black: 64 / 70 sides per minute / Colour: 53 / 53 sides per minute / Colour: 53 / 53 sides per minute / Colour: 52 / 52 sides per minute Scanser Tyme / Al/LT Subjex Scan Speed: Up to Supplies Black: 64 / 70 sides per minute / Colour: 52 / 52 sides per minute Scanser Tyme / Scanser State Supplies Supplies Scanser State Scanser State Supplies Scanser State Scanser State <	Hard Disk	Included in configuration		
Copy Black: 45 cpm / Colour: 40 cpm Black: 50 cpm / Colour: 45 cpm Black: 55 cpm / Colour: 50 cpm Time to First Copy: as fast as Black: 7.1 seconds / Colour: 10.4 seconds Black: 6.8 seconds / Colour: 10.4 seconds Black: 6.4 seconds / Colour: 9.9 seconds Scan Flattbed scanner with ADF / RADF (reversing Duplex) Ad/Ltr Duplex Scan Speed: Up to Black: 6.8 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 38 / 37 sides per minute Black: 6.8 / 70 sides per minute Ad/Ltr Simplex Scan Speed: Up to Black: 6.8 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute Modem Speed 2000-page Colour (CMY) Toner Cartridges 32,000-page Black Toner Cartridge Photoconductor Estimated Yield: Up to ²¹ 11000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling 500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 520-Sheet Input Tray Paper Handling Optional Standard: 620 pages 75 gsm bond Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 3740 pages 75 gsm bond Media Types Supported Card Stock, Envelopes, AJ, AA, AS, CS Envelope, DL Envelope, Reder, TS20-Sheet Torwer Media Types Supported Card Stock, Envelopes	Recommended Monthly Page Volume ⁴	5000 - 33000 pages		
Copy Speed: Up to Black: 45 cpm / Colour: 40 cpm Black: 50 cpm / Colour: 50 cpm Black: 55 cpm / Colour: 50 cpm Time to First Copy: as fast as Black: 7.1 seconds / Colour: 10.4 seconds Black: 6.8 seconds / Colour: 10.4 seconds Black: 6.4 seconds / Colour: 9.9 seconds Scame: Type / ADF Scan Scame: Type / ADF Scan Black: 6.8 / 70 sides per minute / Colour: 52 / 52 sides per minute Ad/Ltr Duplex Scan Speed: Up to Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute Colour: 52 / 52 sides per minute Fax Scame: Type / ADF Scan Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute Supplies States per diminute / Colour: 52 / 53 sides per minute / Colour: 52 / 52 sides per minute Colour: 52 / 52 sides per minute Supplies States per diminute / Colour: 52 / 52 sides per minute Colour: 52 / 52 sides per minute Cartridge(s) Shipping with Product T10000 page, based on 3 average letter/A4-size pages per print job and - 5% coverage Cartridge(s) Shipping with Product States Supplies States Supplies Paper Handling States Supplied States Supplied Paper Handling Optional States Supplied States Supplied Paper Input Capacity: Up to Standard: 2Up pages 75 gim bond / Maximum: 3160 pages 75 gim bond	Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	225000 pages per month	250000 pages per month
Time to First Copy: as fast as Black: 7.1 seconds / Colour: 10.4 seconds Black: 6.8 seconds / Colour: 10.4 seconds Black: 6.4 seconds / Colour: 9.9 seconds Scamer Type / ADF Scan	Сору			
Scan Flatbed scanner with ADF / RADF (reversing Duplex) Ad/Ltr Duplex Scan Speed: Up to Black: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute / Colour: 52	Copy Speed: Up to	Black: 45 cpm / Colour: 40 cpm	Black: 50 cpm / Colour: 45 cpm	Black: 55 cpm / Colour: 50 cpm
Scanner Type / ADF Scan Interversing Duplex A4/Ltr Duplex Scan Speed: Up to Black: 38 / 37 sides per minute / Colour: 58 / 52 sides per minute / Colour: 52 / 52 sides per minute / Colour: 52 / 52 sides per minute / Colour: 52 / 52 sides	Time to First Copy: as fast as	Black: 7.1 seconds / Colour: 10.4 seconds	Black: 6.8 seconds / Colour: 10.4 seconds	Black: 6.4 seconds / Colour: 9.9 seconds
A4/Ltr Duplex Scan Speed: Up to Black: 68 / 70 sides per minute / Colour: 38 / 37 sides per minute / Colour: 38 / 37 sides per minute / Colour: 38 / 37 sides per minute / Colour: 52 / 52 sides per minute A4/Ltr Simplex Scan Speed: Up to Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute Fax Modem Speed 33.6 Kbps Supplies 33.6 Kbps Supplies Vield 0 0 Photoconductor Estimated Yield: Up to ² 11000 pages, based on 3 average letter/A4-size pages per print job and - 5% coverage Cartridge(s) Shipping with Product* 11,000 -page Colour (CMY) Starter Toner Cartridges, 16,000 -page Black Starter Toner Cartridge Paper Handling 500 Sheet Output Bin, Integrated Duplex, 100 Sheet Multipurpose Feeder, 520 Sheet Input Tray Paper Handling Optional Banner Media Tray, 2000 -Sheet Flinkher, 32,520 Sheet Torwer Stand Paper Induding Optional Banner Media Tray, 2000 Sheet Flinkher, 32,520 Sheet Torwer Stand Paper Jout Capacity: Up to Standard: 500 pages 75 gem bond / Maxium: 3760 pages 75 gem bond Media Sizes Supported Card Stack, Envelopes, 34,84,5C Shreubeg, DL Pavelege, BL envelope, 30,15,44, JS -BS, El Torwer Standard: 500 pages 75 gem bond / Maxium: 3750 pages 75, gem bond; Media Sizes Supported Card Stack, Envelopes, 7,34E Travelopes, 34,84,5C Shreubege, DL envelope, 20, JIS -44, JIS -85, Card Stack & Label Guide. Media Sizes	Scan			
A/Ltr Simplex Scan Speed: Up to Black: 68 / 70 sides per minute / Colour: 53 / 53 sides per minute / Colour: 53 / 53 sides per minute / Colour: 53 / 53 sides per minute / Modem Speed Black: 68 / 70 sides per minute / Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute Fax Black: 68 / 70 sides per minute / Modem Speed Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute Supplies Stapplex Stapplex Supplies Yield' Colour: 50 / 52 sides per minute / 11,000-page Colour (CMY) Toner Cartridges, 32,000-page Black Toner Cartridge Cartridge(Shipping with Product) Cartridge(Shipping with Product) Paper Handling Cartridge(Shipping with Product) Colour: 50 / 52 sides per minute / 10,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling Standard Standard Standard: Standard Standard: Standard: Standard Paper Input Capacity: Up to Standard: Standard: Standard: Standard: Stap pages 75 gsm bond / Moximum: 5140 pages 75 gsm bond Paper Output Capacity: Up to Standard: Standard: Standard: Stap pages 75 gsm bond / Moximum: 3150 pages 75 gsm bond Media Sizes Supported US S 2.0 Specification Hi-Speed Certified (Type B), Front US S 2.0 Specification Hi-Speed Certified (Type A), Rear USS 2.0 Specification Hi-Speed Certified (Type B), Front US S 2.0 Specification Hi-Speed Certified Part (Type A), Rear USS 2.0 Specification Hi-Speed Certified (Type B), Front US S 2.0 Specification Hi-Speed Certified Part (Type A), Rear USS 2.0 Specification Hi-Speed Certified (Type B), Front US S 2.0 Specification Hi-Speed Certified Par	Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (reversing Duplex)		
FaxModem SpeedModem Speed33.6 kbpsSupplies22,000-page Colour (CMY) foare Cartridges, 32,000-page Black TortridgeSupplies Yield'22,000-page Colour (CMY) starter Toner Cartridges, 32,000-page Black TortridgeCartridge(s) Shipping with Product'11000-page Colour (CMY) starter Toner Cartridges, 16,000-page Black Starter Toner CartridgeCartridge(s) Shipping with Product'0111,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner CartridgePaper Handling500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 350-Sheet Input ToryPaper Handling Optional0500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 350-Sheet Torawer StandPaper Input Capacity. Up to0500-Sheet Multipurpose, Feeder, 350-Sheet Trainer, 3, 520-Sheet Torawer StandPaper Output Capacity. Up to0500-Sheet Multipurpose, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stack & Label Guide.Media Types Supported10 Envelope, 7, 34 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folin, JIS-B4, JIS-B5, Ledger, Leggl, Letter, Statement, Universal, Super Tabled (305 x 457 mon), Offico, A6Optional Network Ports / Optional Local PortNES 2.0 Specification Hi-Speed Certified (Yp B, Front USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Reer USB 2.0 Specification Hi-Speed Certified Port (Ype A), Stach A-Copy: 55 dBA / Scan: 55 dBAOption	A4/Ltr Duplex Scan Speed: Up to	Black: 38	3 / 37 sides per minute / Colour: 38 / 37 sides pe	er minute
Modem Speed 33.6 Kbps Supplies Supplies Yield ¹ 22,000-page Colour (CMY) Toner Cartridges, 32,000-page Black Toner Cartridge Photoconductor Estimated Yield: Up to ³ 115000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage Cartridge(s) Shipping with Product ¹ 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Toner Cartridge Paper Handling Paper Handling Standard 500-Sheet Output Bin, Integrated Duples, 100-Sheet Multipurpose Feeder, 520-Sheet Input Tray Paper Handling Optional Banner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3 x 520-Sheet Drawer Stand, Bookter Finisher, 3, x 520-Sheet Tonwer Stand Standard: 620 pages 75 gsm bond Youtput Starter Toner Cartridge Paper Handling Optional Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transporencies, Refer to the Card Stock & Label Guide. Standard: 620 pages 75 gsm bond / Maximum: 3140 pages 75 gsm bond Paper Supported Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transporencies, Refer to the Card Stock & Label Guide. Standard: Statement, Ustrevelope, B, Envelope, Executive, Folio, JIS: B4, JIS: B5, Second State Maximum: 3140 pages 75 gsm bond Media Sizes Supported USB 2.0 Specification Hi-Speed Cartified (Type A), Envelope, Executive, Folio, JIS: B4, JIS: B5, Second State Maximum: 3140 pages 75 gsm bond Media Sizes Supported USB 2.0 Specification Hi-Speed Cartified Cartrype A), Envelope, Executive, Folio, JIS: B4, J	A4/Ltr Simplex Scan Speed: Up to	Black: 68 / 70 sides per minute / Black: 68 / 70 sides per minute / Colour: 52 / 52 sides per minute		
Supplies Supplies Yield' 22,000-page Colour (CMY) Toner Cartridges, 32,000-page Black Toner Cartridge Photoconductor Estimated Yield: Up to? 115000 pages, based on 3 average letter/A4-size pages per print job and - 5% coverage Cartridge(S) Shipping with Product' 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling 500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 520-Sheet Input Tray Paper Handling Optional Banner Media Troy, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3, s20-Sheet Drawer Stand Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond Paper Output Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 3140 pages 75 gsm bond Media Types Supported Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transporencies, Refer to the Card Stock & Label Guide. Media Sizes Supported 10 Envelope, 73/4 Envelope, A3, A4, A5, C5 Envelope, D1 Envelope, Edity, Key Kug, Ledig, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Ofricio, A6 General Information USB 2.0 Specification Hi-Speed Certified Opt (Type A), Rear USB 2.0 Specification Hi-Speed Certified Parallel Noise Level: Operating Print: S2 dBA / Coop: S5 dBA / Coop: S5 dBA / Scan: S5 dBA Optional Network Ports / Optional Local Ports Interend MarkNet ^m NB130 Fiber F	Fax			
Supplies Yield! 22,000-page Colour (CMY) Toner Cartridges, 32,000-page Black Toner Cartridge Photoconductor Estimated Yield: Up to ³ 115000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage Cartridge(s) Shipping with Product ¹ 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling Standard 0500-Sheet Output Bin Integrated Duplex, 100-Sheet Multipurpose Feeder, 3200-Sheet Drawer Stand, 800klet Finisher, 2,520-Sheet Tonadem Tray Module, 520-Sheet Drawer Stand Paper Handling Optional Banner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Drawer Stand Paper Juput Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond Paper Output Capacity: Up to Card Stock, Envelope, Alay, Alay, AS, CS Envelope, DL Envelope, Escutty, Folio, JIS-84, JIS-85, Ledel Guide. Media Types Supported Card Stock, Envelope, Alay, Alay, AS, CS Envelope, DL Envelope, Escutty, Folio, JIS-84, JIS-85, Ledel Guide. Media Sizes Supported Standard Connectivity Standard Connectivity Standard So Specification Hi-Speed Certified Type B), Front USB 2.0 Specification Hi-Speed Scriffied Opt (Type A), Escutty, Folio, JIS-84, JIS-85, Ledel Guide. Optional Network Ports / Optional Local Ports Internal MarkNet TM NB130 Fibe	Modem Speed		33.6 Kbps	
Photoconductor Estimated Yield: Up to? 115000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage Cartridge(s) Shipping with Product' 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling Starter Toner Cartridge, 16,000-page Black Starter Toner Cartridge Paper Handling Standard Store Starter Toner Cartridge, 16,000-page Black Starter Toner Cartridge Paper Handling Optional Banner Media Tray, 2000-Sheet High Capacity Feeder, 3500-Sheet Drawer Stand, Booklet Finisher, 35,200-Sheet Tandem Tray Module, 5200-Sheet Drawer Stand Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: S140 pages 75 gsm bond Paper Supported Card Stock, Envelopes, Clossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide. Media Types Supported Card Stock, Envelope, 7,3/4 Envelope, A3, 4,5, CS Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legdi, Legder, Legdi, Ledger, Legdi, Ledder, Ledger, Legdi, Ledder, JL Envelope, A3, 4,5, CS Envelope, DL Envelope, A3, 4,5, CS Envelope, Back Totica, A6 General Information USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Enternet Ho	Supplies			
Cartridge(s) Shipping with Product* 11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge Paper Handling Paper Handling Standard 500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 520-Sheet Input Tray Paper Handling Optional Banner Media Tray, 2,000-Sheet High Capacity Feeder, 3500-Sheet Tinsher, 3, x 520-Sheet Drawer Stand Paper Handling Optional Banner Media Tray, 2,000-Sheet Tinsher, 3, x 520-Sheet Drawer Stand Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond Paper Output Capacity: Up to Standard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bond Media Types Supported Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide. Media Sizes Supported 10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6 General Information Standard Connectivity USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet To/T000 BaseTX (RJ-45) Optional Network Ports / Optional Local Ports Internal MarKNet ^m MR3103 Fiber Fast Ethernet, Internal MarKNet ^m S250 802.11b/g/n Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Specified Operat	Supplies Yield ¹	22,000-page Co	our (CMY) Toner Cartridges, 32,000-page Black	k Toner Cartridge
Paper Handling Paper Handling Standard 500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 520-Sheet Input Tray Paper Handling Optional Banner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3 x 520-Sheet Drawer Stand, Booklet Finisher, 2,520-Sheet Tandem Tray Module, 520-Sheet Drawer Stand Paper Input Capacity: Up to Standard: 620 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bond Paper Output Capacity: Up to Standard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bond Media Types Supported Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide. Media Sizes Supported 10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Ledgel, Letter, Statement, Universal, Super Tabloid (305 x7 mm), Ofticio, Ad General Information USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified Type A), Rear USB 2.0 Specification Hi-Speed Certified Type A), Ethernet, Internal MarkNet TM N8130 Fiber Fast Ethernet, Internal MarkNet TM N8250 802.11b/g/n Optional Network Ports / Optional Local Ports Internal MarkNet TM N8130 Fiber Fast Ethernet, Internal MarkNet TM N8250 802.11b/g/n Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 55 dBA Specified Operating Environment Altitude: 0 - 2500 Meeters (8,200 Feet), Temperature: 10	Photoconductor Estimated Yield: Up to ²	115000 pages, based	on 3 average letter/A4-size pages per print jo	b and ~ 5% coverage
Paper Handling StandardS00-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, S20-Sheet Input TrayPaper Handling OptionalBanner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3 x 520-Sheet Drawer StandPaper Input Capacity: Up toStandard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bondPaper Output Capacity: Up toCard Stock, Envelopes, Glossy pager, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.Media Types SupportedCard Stock, Envelope, Glossy pager, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.Media Sizes SupportedCard Stock, Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6Standard ConnectivityUSB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10//01000 BaserX (R1-45)Optional Network Ports / Optional Local PortsInternal MarkNet TM N8130 Fiber Fast Ethernet, Internet MarkNet TM N8130	Cartridge(s) Shipping with Product ¹	11,000-page Colour (CMY) Starter Toner Cartridges, 16,000-page Black Starter Toner Cartridge		
Paper Handling OptionalBanner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3 x 520-Sheet Drawer StandPaper Handling OptionalBanner Media Tray, 2,000-Sheet Tandem Tray Module, 520-Sheet Drawer StandPaper Input Capacity: Up toStandard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bondPaper Output Capacity: Up toStandard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bondMedia Types SupportedCard Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.Media Sizes Supported10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6General InformationUSB 2.0 Specification Hi-Speed Certified Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (R1-45)Optional Network Ports / Optional Local PortsInternal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless / Internal R5-232C serial, Internal MarkNet™ N8250 Meters (B,200 Feet), Temperature: 10 to 32°C, Almidity: 15 to 85% Relative Humidity: 15 to 85% Relative Humidity:Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBAProduct GuaranteeInternal Conset Service, Next Business DayAltitude: 0 - 2500 Meters (B,200 Feet), Temperature: 10 to 32°C, Almidity: 15 to 85% Relative Humidity: 15 to 85% Relative Humidity:Altitude: 0 - 2500 Meters (B,200 Feet), Temperature: 10 to 32°C, Almidity: 15 to 85% Relative Humidity: 15 to 85% Relative Humidity:Altitude: 0 - 2500 Meters (B,200 Feet), Temperature: 10 to 32°C, Almidity: 15 to 85% Relative Humidity: 15 to 85% Relative Humidity: <td< td=""><td>Paper Handling</td><td></td><td></td><td></td></td<>	Paper Handling			
Paper Input Capacity: Up toStandard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bondPaper Output Capacity: Up toStandard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bondMedia Types SupportedCard Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.Media Sizes Supported10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Leggl, Letter, Statement, Universal, Super Tabloid (305 x-UK), MORTON, OFICIO, A6General InformationUSB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)Optional Network Ports / Optional Local PortsInternal MarkNet™ NB130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless / Internal RS-232C serial, Internal 1284+ Bidirection Wireless / Internal RS-232C serial, Internal 1284+ Bidirection 2300 Meters (RJ 200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (RJ 200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (RJ 200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative HumidityPrint: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Altitude: 0 - 2500 Meters (RJ 200 Feet), 	Paper Handling Standard			
Paper Output Capacity: Up toStandard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bondMedia Types SupportedCard Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.Media Sizes Supported10 Envelope, 73/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statemet, Universal, Super Tabloid (30 K37 mm), Oficio, A6General InformationUSB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Enternal MarkNet TM N8130 Fiber Foat Ethernet, Internal MarkNet TM N8250 802.11b/g/n Virelas A (R)-450Noi	Paper Handling Optional	Banner Media Tray, 2,000-Sheet High Capacity Feeder, 3,500-Sheet Finisher, 3 x 520-Sheet Drawer Stand, Booklet Finisher, 2,520-Sheet Tandem Tray Module, 520-Sheet Drawer Stand		
Media Types Supported Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide. Media Sizes Supported 10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6 General Information VISB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45) Optional Network Ports / Optional Local Ports USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45) Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 55 dBA Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 Print: 53 dBA / Copy: 55 dBA / Scan: 55 dBA Product Guarantee Internal Ward NetWork Service, Next Business Day	Paper Input Capacity: Up to	Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond		
Media Sizes Supported 10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6 General Information Standard Connectivity USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45) Optional Network Ports / Optional Local Ports Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 35% Relative Humidity Sto 85% Relative Humidity	Paper Output Capacity: Up to	Standard: 500 pages 75 gsm bond / Maximum: 3750 pages 75 gsm bond		
General Information Standard Connectivity USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45) Optional Network Ports / Optional Local Ports Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 35% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 t	Media Types Supported	Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.		
Standard ConnectivityUSB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/10/1000 BaseTX (RJ-45)Optional Network Ports / Optional Local PortsInternal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ S50 802.11b/g/n Wireless / Internal RS-232C serial, Internal 1284-B Bidirection / ParallelNoise Level: OperatingPrint: 52 dBA / Copy: 55 dBA / Scan: 55 dBAPrint: 53 dBA / Copy: 55 dBA / Scan: 54 dBASpecified Operating EnvironmentAltitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 	Media Sizes Supported	10 Envelope, 7 3/4 Envelope, A3, A4, A5, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (305 x 457 mm), Oficio, A6		
Optional Network Ports / Optional Local Ports Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Product Guarantee Comperation Static Stat	General Information			
Optionial Network Ports / Optionial Eocal Ports Wireless / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel Noise Level: Operating Print: 52 dBA / Copy: 55 dBA / Scan: 55 dBA Print: 53 dBA / Copy: 55 dBA / Scan: 54 dBA Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), 15 to 85% Relative Humidity Product Guarantee	Standard Connectivity	USB 2.0 Specification Hi-Speed Rear USB 2.0 Specificatio	Certified (Type B), Front USB 2.0 Specification H n Hi-Speed Certified port (Type A), Ethernet 10/	Hi-Speed Certified port (Type A), 100/1000 BaseTX (RJ-45)
Specified Operating Environment Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Temperature: 10 to 32°C, Altitude: 0 - 2300 Meters (7,545 Feet), Humidity: 15 to 85% Relative Humidity Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity Product Guarantee 1-Year Onsite Service, Next Business Day	Optional Network Ports / Optional Local Ports	Internal MarkNet™ N8130 Fiber Fast Ethernet. Internal MarkNet™ N8250 802.11b/a/n		
Product Guarantee 1-Year Onsite Service, Next Business Day	Noise Level: Operating	,		
Product Guarantee 1-Year Onsite Service, Next Business Day	Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity	Temperature: 10 to 32°C, Altitude: 0 - 2300 Meters (7,545 Feet), Humidity: 15 to 85% Relative Humidity	Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 32°C, Humidity: 15 to 85% Relative Humidity
Size (mm - H x W x D) / Weight 762 x 640 x 685 mm / 116.0 kg	Product Guarantee			
	Size (mm - H x W x D) / Weight	762 x 640 x 685 mm / 116.0 kg		

¹Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ²Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MPPs. ⁴"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

This is a Class A device according to the FCC Rules and EN 55022/EN 55032 emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.



energy

AirPrint

www.lexmark.com

© 2016 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.

AirPrint and the AirPrint logo are trademarks of Apple Inc.